



- Heavy Duty, .08" Wall Thickness
- ISO 6945 Certified
- Professional Grade Construction
- Smooth Inner Wall Prevents Internal Abrasion Damage
- Braided Nylon Resists UV, Salt Chemicals, Vermin And Rot
- Halogen Free



Cut Cleanly
Scissors

Material

Nylon

Grade

DPN

Wall Thickness

.08"

Drawing Number

TF001DP-WD

Put-Ups

Nominal Size	Part #	Wall Thickness	Bulk Spool	Shop Spool	Available Colors	Lbs/100'
0.75"	DPN0.75BK	.08"	100'	50'	Black	4.43
0.93"	DPN0.93BK	.08"	100'	50'	Black	5.51
1.13"	DPN1.13BK	.08"	100'	50'	Black	7.15
1.25"	DPN1.25BK	.08"	100'	50'	Black	7.44
1.35"	DPN1.35BK	.08"	100'	50'	Black	8.02
1.43"	DPN1.43BK	.08"	100'	50'	Black	8.32
1.63"	DPN1.63BK	.08"	100'	50'	Black	9.53
1.81"	DPN1.81BK	.08"	100'	50'	Black	10.71
2.19"	DPN2.19BK	.08"	100'	50'	Black	12.31
2.63"	DPN2.63BK	.08"	100'	50'	Black	14.83
2.88"	DPN2.88BK	.08"	100'	50'	Black	17.30
3.13"	DPN3.13BK	.08"	50'	25'	Black	18.04
3.38"	DPN3.38BK	.08"	50'	25'	Black	20.11
3.63"	DPN3.63BK	.08"	50'	25'	Black	21.60
4.00"	DPN4.00BK	.08"	50'	25'	Black	23.52

ISO 6945 Certified Hose Protection


Dura Flex Professional (DP) provides tough hose protection two ways. First, per the ISO 6945 spec, DP's unique .08" thick tubular weave design will withstand greater than 200,000 abrasion cycles without wearing through the fabric at any location.

Additionally, the exceptionally smooth inner wall provides easy installation and minimizes any internal abrasion problems. The tightly woven Nylon® construction is extremely flexible and resists chemical and ultraviolet degradation.

DP is perfect for industrial and construction applications where ISO certified hose protection is called for.

This is a non-expandable product. Be sure to match your application diameter accurately.

Colors Available:
Black (BK)

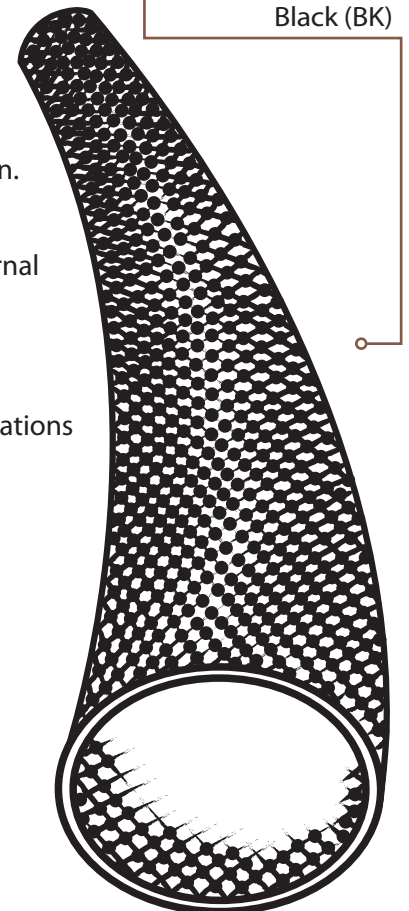

TECHFLEX
Braided Sleeving Products

www.techflex.com

800.323.5140 • 973.300.9242 • fax: 973.300.9409
104 Demarest Road • Sparta, NJ 07871

ISO
6945

MSHA





ABRASION

Abrasion Resistance
Extreme

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

Room Temperature
85°F

Humidity
74%

Minimal Visible Wearing
Into Material
400 Test Cycles

Visible Wearing
Into Material
3,000 Test Cycles

Heavy Wear But Not Yet
Through The Material
11,000 Test Cycles

Material Destroyed
-Hole Through Material
13,000 Test Cycles

Pre-Test Weight
14,096 mg

Post-Test Weight
11,705 mg

Test End Loss Of Mass
Point Of Destruction
2,391 mg

CHEMICAL RESISTANCE


1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	1
Aliphatic Solvents _____	1
Chlorinated Solvents _____	1
Weak Bases _____	1
Salts _____	1
Strong Bases _____	2
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	5
Strong Oxidants _____	5
Esters/Ketones _____	1
UV Light _____	2
Petroleum _____	3
Fungus ASTM G-21 _____	2
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	



PHYSICAL PROPERTIES

Monofilament Diameter _____	NA
ASTM D-204	
Flammability Rating _____	
Recommended Cutting _____	Scissor
Colors _____	1
Wall Thickness _____	.08
Tensile Strength (Yarn) _____	
ASTM D-2256 Lbs	
Specific Gravity ASTM D-792 _____	1.14
Moisture Absorption _____	2.7
% ASTM D-570	
Hard Vacuum Data _____	
ASTM E-595 at 10-5 torr	
TML _____	1.10
CVCM _____	.01
WVR _____	.69
Smoke D-Max _____	
ASTM E-662	
Outgassing _____	High
Oxygen Index _____	22
ASTM D-2863	

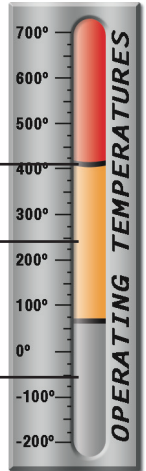

Melt Point
ASTM D-2117
410°F (210°C)

Maximum Continuous
Mil-I-23053
248°F (120°C)

Minimum Continuous
-49°F (-45°C)