



- Molten Splash Up to 2200°F
- Strong Hook and Loop Closure
- Wrap Around Fire Protection

## Put Ups

Nominal Size	Part #	Wall Thickness ±0.010"	Velcro Width	Bulk Spool	Shop Spool	Available Colors	Lbs/100'
1"	FIW1.00RD	.045"	5/8"	150'	25'	Red RD	9.16
1 1/2"	FIW1.50RD	.045"	5/8"	150'	25'	Red RD	12.98
2"	FIW2.00RD	.045"	5/8"	150'	25'	Red RD	16.80
2 1/2"	FIW2.50RD	.045"	5/8"	150'	25'	Red RD	20.61
3"	FIW3.00RD	.045"	5/8"	150'	25'	Red RD	24.43
3 1/2"	FIW3.50RD	.045"	5/8"	150'	25'	Red RD	28.25
4"	FIW4.00RD	.045"	5/8"	150'	25'	Red RD	32.07



**Cut Cleanly  
Scissors**

### Material

**Silicone Coated Fiberglass**

### Grade

**FF Wrap**


### Wall Thickness

**.045"**

## Wrappable Hose Protection

FIREFLEX WRAP (FIW) protects and shields important hoses and cables from extreme heat and catastrophic flame outbreaks. It protects continuously to 500°F and will withstand a molten splash at 2200°F.

Its unique hook and loop closure system allows for installation without the need to remove and reconnect fittings and terminations. The reusable closure additionally allows for easy repair, minimizing labor and costly downtime.

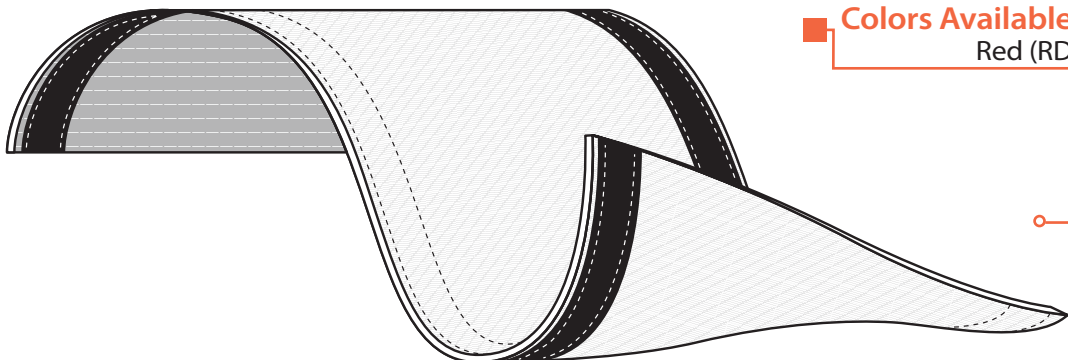

**Colors Available:**  
Red (RD)

**Easy Installation and allows for easy repairs**



**TECHFLEX**  
Braided Sleeving Products

[www.techflex.com](http://www.techflex.com)

800.323.5140 • 973.300.9242 • fax: 973.300.9409  
104 Demarest Road • Sparta, NJ 07871





## ABRASION FLAMMABILITY

**Abrasion Resistance**  
**High**

**Abrasion Test Machine**  
**Taber 5150**

**Abrasion Test Wheel**  
**Calibrase H-18**

**Abrasion Test Load**  
**500g**

Rating \_\_\_\_\_ Non Flammable

## CHEMICAL RESISTANCE


1=No Effect      4=More Affected  
2=Little Effect    5=Severely Affected  
3=Affected

Aromatic Solvents _____	1
Aliphatic Solvents _____	1
Chlorinated Solvents _____	1
Weak Bases _____	1
Salts _____	1
Strong Bases _____	1
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	2
Strong Oxidants _____	2
Esters/Ketones _____	1
UV Light _____	1
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	

**Melt Point**  
*ASTM D-2117*  
**2,048°F (1,120°C)**

**Maximum Continuous**  
*Mil-I-23053*  
**500°F (260°C)**

**Minimum Continuous**  
**-65°F (-54°C)**

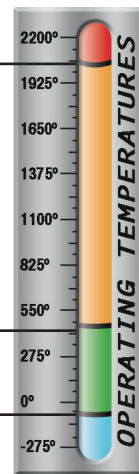

## PHYSICAL PROPERTIES

Monofilament Diameter \_\_\_\_\_ NA  
*ASTM D-204*  
Flammability Rating \_\_\_\_\_ Non Flammable  
Recommended Cutting \_\_\_\_\_ Scissor  
Colors \_\_\_\_\_ 1  
Wall Thickness \_\_\_\_\_ .045  
Tensile Strength (Yarn) \_\_\_\_\_  
*ASTM D-2256 Lbs*  
Specific Gravity *ASTM D-792* \_\_\_\_\_ NA